

”

”

”


”

”

”

”

”

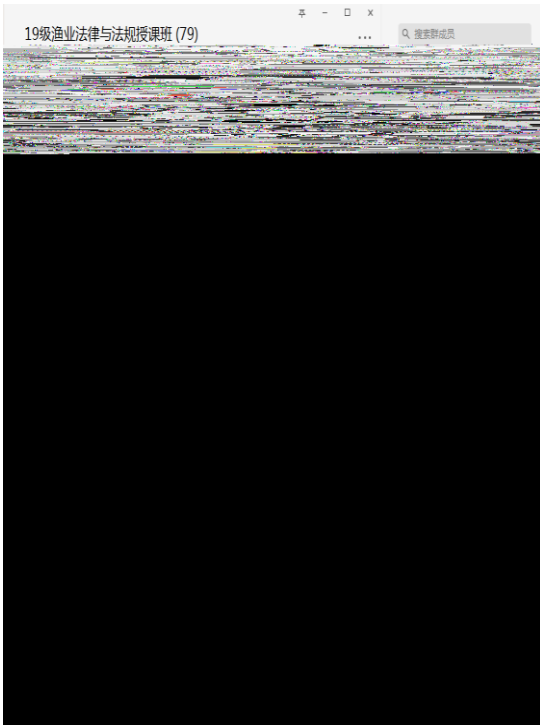


”

”

”

”



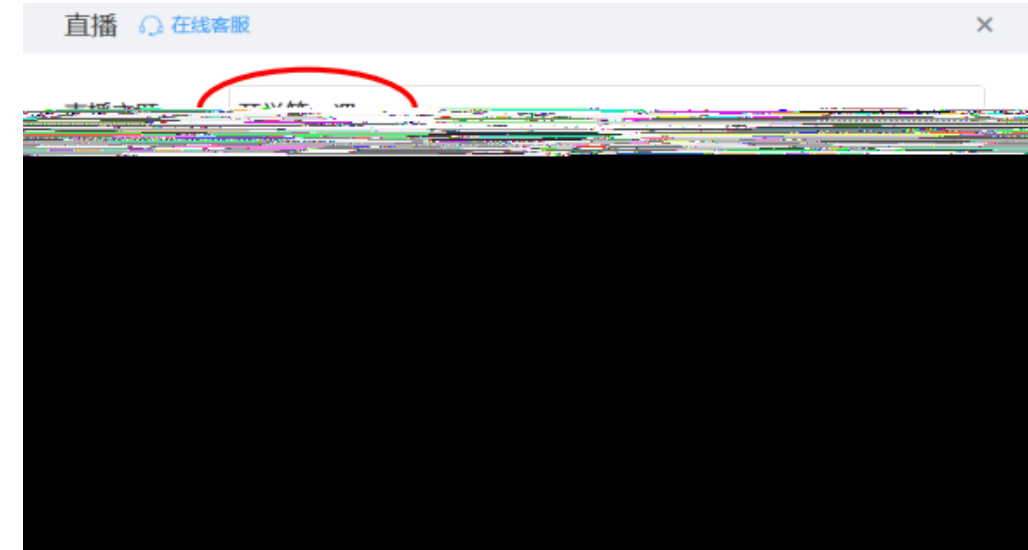

18:01 1.00 Kbps

直播回放 发起直播

2月19号 导出数据

全部直播 我发起的直播

直播时长 01:49:54
点赞数 0
消息数 79

观看成员(74) 未观看成员(58)

志丹	邵志丹妈妈(家长)	观看直播 00:00:10
孟敏	孟敏家长(家长)	观看直播 01:49:46
刘洪昌	刘洪昌家长(家长)	观看直播 00:44:33

A screenshot of a live broadcast replay page. The top status bar shows the time 18:01 and a data rate of 1.00 Kbps. The page has a navigation bar with "直播回放" (Live Broadcast Replay) and "发起直播" (Start Live Broadcast). Below this is a sub-header with "全部直播" (All Live Broadcasts) and "我发起的直播" (Live Broadcasts I Started). The main content area is split into two columns. The left column contains a video player that is mostly obscured by a grey rectangle. The right column displays broadcast statistics: "直播时长 01:49:54", "点赞数 0", and "消息数 79". Below the statistics are two tabs: "观看成员(74)" (Viewers (74)) and "未观看成员(58)" (Not Viewers (58)). Under the "观看成员" tab, there is a list of viewers. The first two entries are highlighted with red boxes: "志丹 邵志丹妈妈(家长) 观看直播 00:00:10" and "孟敏 孟敏家长(家长) 观看直播 01:49:46". The bottom of the page shows a corrupted video player area with horizontal lines and noise.

" "

" "

" "

" "